HYPER VS2T Electric

SETUP SHEET

Name: Default Settings | **Date:** | **Track:** | **Event:**

Note:

Steering

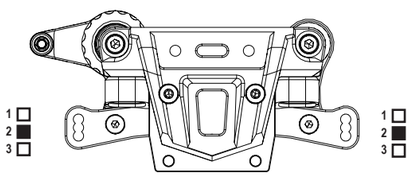

Servo Linkage



20.2 mm

Wing



Front Arms

#85172
FRONT TRACK WIDTH
ADJUSTABLE SPACERS



1 mm
2 mm





#85078
Adjustable Arm Retainer Clip

□ 0mm □ 1mm □ 2mm □ 3mm □ 4mm ■ 5mm



■ 0mm □ 1mm □ 2mm □ 3mm □ 4mm □ 5mm

50.7 mm



Rear Arms

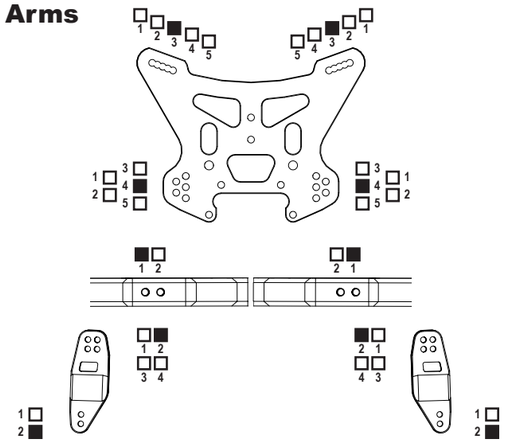

#85029
Arm Spacer

Front □ 0mm ■ 2.5mm □ 5mm

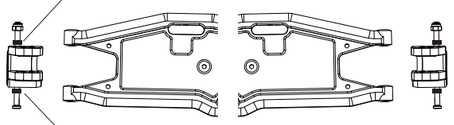

Rear □ 0mm ■ 2.5mm □ 5mm

56.3 mm



Arm Holder Pill Inserts

#85211
Possible insertion locations

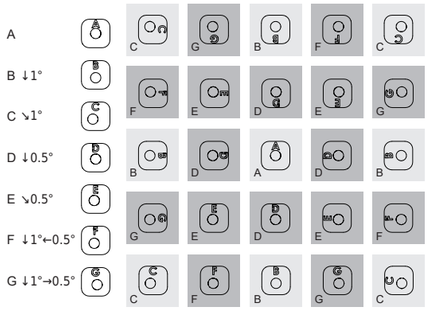

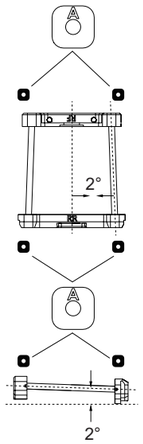



UF



UR

FF

FR



RF

RR

Front Sway Bar



□ 2.3mm ■ 2.5mm
□ 2.8mm □ 3.0mm

Rear Sway Bar

□ 2.3mm □ 2.5mm
■ 2.8mm □ 3.0mm

Differential

Gear		Oil	
Front:	46T/10	Front:	#20000
Center:	45T	Center:	#20000
Rear:	46T/10	Rear:	#7000

Motor

Motor: _____ Motor Gear: 14T

Electronics

_____

_____

Wheels/Tire

_____

_____

Front Shock

Oil: #500
Spring: K:1



Length: _____ mm

Shock Piston



Rear Shock

Oil: #500
Spring: K:0.85



Length: _____ mm

Shock Piston